

SWA Enable Sensor Commanding
File: IA-FCP-110.xls
Author: daniel lakey



Procedure Summary

Objectives

Enable Sensor Commanding

Summary of Constraints

n/a

Spacecraft Configuration

Start of Procedure

Type Pre-condition Here

End of Procedure

Type Post-condition Here

Reference File(s)

Input Command Sequences

Output Command Sequences

AIAF110A

Referenced Displays

ANDs GRDs SLDs

Configuration Control Information

DATE	FOP ISSUE	VERSION	MODIFICATION DESCRIPTION	AUTHOR	SPR REF
25/03/2020		1	Renamed	dlakey	M7


SWA Enable Sensor Commanding
File: IA-FCP-110.xls
Author: daniel lakey



solar orbiter



Procedure Flowchart Overview

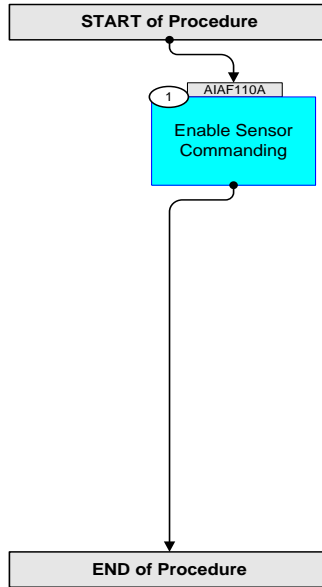

SWA Enable Sensor Commanding
File: IA-FCP-110.xls
Author: daniel lakey



solar orbiter



Step	Label/Time	Activity/Remarks/Branch	CK	Display
Beginning of Procedure				
Beginning of Sequence				
	AIAF110A	SWA Enable SensorCmd SeqFlags [Crit/Plan/Stdalone/Sched] : NSYN Forced Subschedule : SWA (109) TimeTag type : B <u>Formal Parameter List</u> {FP} XF110A01 DefVal = 0 (EN_EAS2) <dec> {FP} XF110A02 DefVal = 0 (EN_EAS1) <dec> {FP} XF110A03 DefVal = 0 (EN_PAS) <dec>		
1		Enable Sensor Commanding		
		Enable sensor commanding (default is for EAS1, EAS2 and PAS all enabled)		
	+00.00.00	Send SWA_TC_DPU_SENSOR_CONTROL ZIA58004 SWA_TC_DPU_SENSOR_CONTROL TC Control Flags: GBM IL DSE --Y NC --- Command Parameters : PIA60852 SPARE = 0 <dec> PIA60853 EN_EAS2 = XF110A01 PIA60854 EN_EAS1 = XF110A02 PIA60855 EN_PAS = XF110A03		
AIAF110A End of Sequence				
End of Procedure				