

SWA Disable Sensor Commanding
File: IA-FCP-111.xls
Author: daniel lakey



Procedure Summary

Objectives

Disble Sensor Commanding

Summary of Constraints

n/a

Spacecraft Configuration

Start of Procedure

Type Pre-condition Here

End of Procedure

Type Post-condition Here

Reference File(s)

Input Command Sequences

Output Command Sequences

AIAF111A

Referenced Displays

ANDs GRDs SLDs

Configuration Control Information

DATE	FOP ISSUE	VERSION	MODIFICATION DESCRIPTION	AUTHOR	SPR REF
25/03/2020		1	Renamed	dlakey	M7


SWA Disable Sensor Commanding
File: IA-FCP-111.xls
Author: daniel lakey



solar orbiter



Procedure Flowchart Overview

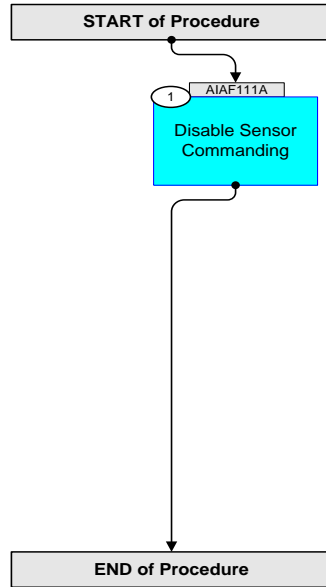

SWA Disable Sensor Commanding File: IA-FCP-111.xls Author: daniel lakey	 
---	--

Step	Label/Time	Activity/Remarks/Branch	CK	Display
Beginning of Procedure				
Beginning of Sequence				
AIAF111A		SWA Disab Sensor Cmd SeqFlags [Crit/Plan/Stdalone/Sched] : NSYN Forced Subschedule : SWA (109) TimeTag type : B <u>Formal Parameter List</u> {FP} XF111A01 DefVal = 1 (EN_EAS2) <dec> {FP} XF111A02 DefVal = 1 (EN_EAS1) <dec> {FP} XF111A03 DefVal = 1 (EN_PAS) <dec>		
1		Disable Sensor Commanding		
		Disable sensor commanding (default is for EAS1, EAS2 and PAS all disabled)		
	+00.00.00	Send SWA_TC_DPU_SENSOR_CONTROL ZIA58004 SWA_TC_DPU_SENSOR_CONTROL TC Control Flags: GBM IL DSE --Y NC --- Command Parameters : PIA60852 SPARE = 0 <dec> PIA60853 EN_EAS2 = XF111A01 PIA60854 EN_EAS1 = XF111A02 PIA60855 EN_PAS = XF111A03		
AIAF111A End of Sequence				
End of Procedure				